

Isabella

SINGLE STALL URINAL KIT

Features

- Single stall flushing system
- Automatic & touch-free
- Compact 80mm ceiling-recessed infrared sensor
- Narrow beam limits detection area to under 300mm wide
- Five second sensor delay beats accidental tripping
- Adjustable flush cycle to meet your needs precisely
- Factory set for 12-hour janitor flush when unused
- Solenoid latching valve supplied with connections
- Power pack (240/6 volt) connects to 10-amp GPO
- **WELS 4 Star rated, 1.1L per flush per stall**

Requires Zip FlushMaster Direct Injection Air Break Valve in-water supply line (available separately).





Ceiling sensor.
80 mm diameter x 64 mm cutout.



Latching valve with plumbing connections and Zip Restrictaflow water flow restrictor.



Recommended heights (see drawing below)	
Standard / Adult	610 mm
Junior	500 mm
Persons with Disability	400 mm

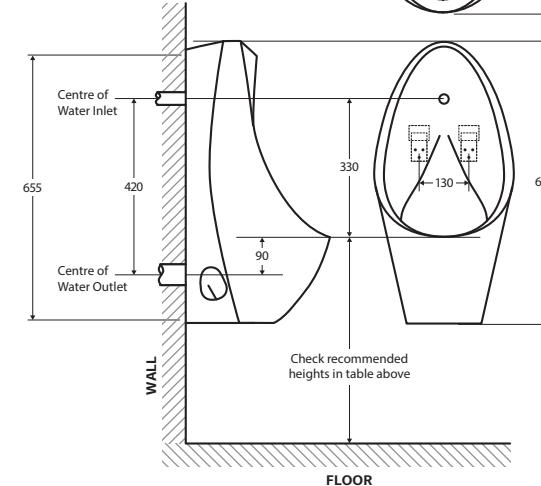

Available in



Gloss White
K3040Z

Cleaning & Care

- Clean only with a soft cloth or sponge using warm water and mild soap or detergent. Do not use any abrasive cleaning materials.
- Do not use any solvents or corrosive liquids.



We aim to ensure that specifications are correct at the time of publication. All measurements are shown in millimetres. For ceramic products, please allow +/- 10 mm tolerance for manufacturing variance. Always use measurements of actual product received for final specification as the technical drawing may contain differences. Due to printing limitations, physical colour may vary from the image shown. Fienza reserves the right to make modifications without prior notice.